



▶ Industrial Communication Technology

TMG Technologie und Engineering

We make technology
work for you.



Accredited as
PROFIBUS & PROFINET
Competence Center



Accredited as
IO-Link
Competence & Test Center

EtherNet/IP™

EtherCAT®

functional safety



Safety over
EtherCAT®

IO-Link
safety

device engineering, IoT and edge gateways

- ★ Device Engineering Tools
- ★ Communication Drivers
- ★ WEB Services
- ★ Cloud Services
- ★ IT Integration

Td
TOOL CALLING INTERFACE

SMI-TCP

MQTT

TMG-UDP



Consulting


- ▶ Workshops and Technology Trainings
- ▶ Realization of system and architecture analyses
- ▶ Problem oriented choice of technology

Development

- ▶ Specification and design
- ▶ Development and integration of software solutions
- ▶ Embedded Software Development
- ▶ Third party certification support

Products

- ▶ Industrial Communication Stacks
- ▶ Engineering & Test Tools
- ▶ IO-Link Master & Device Products

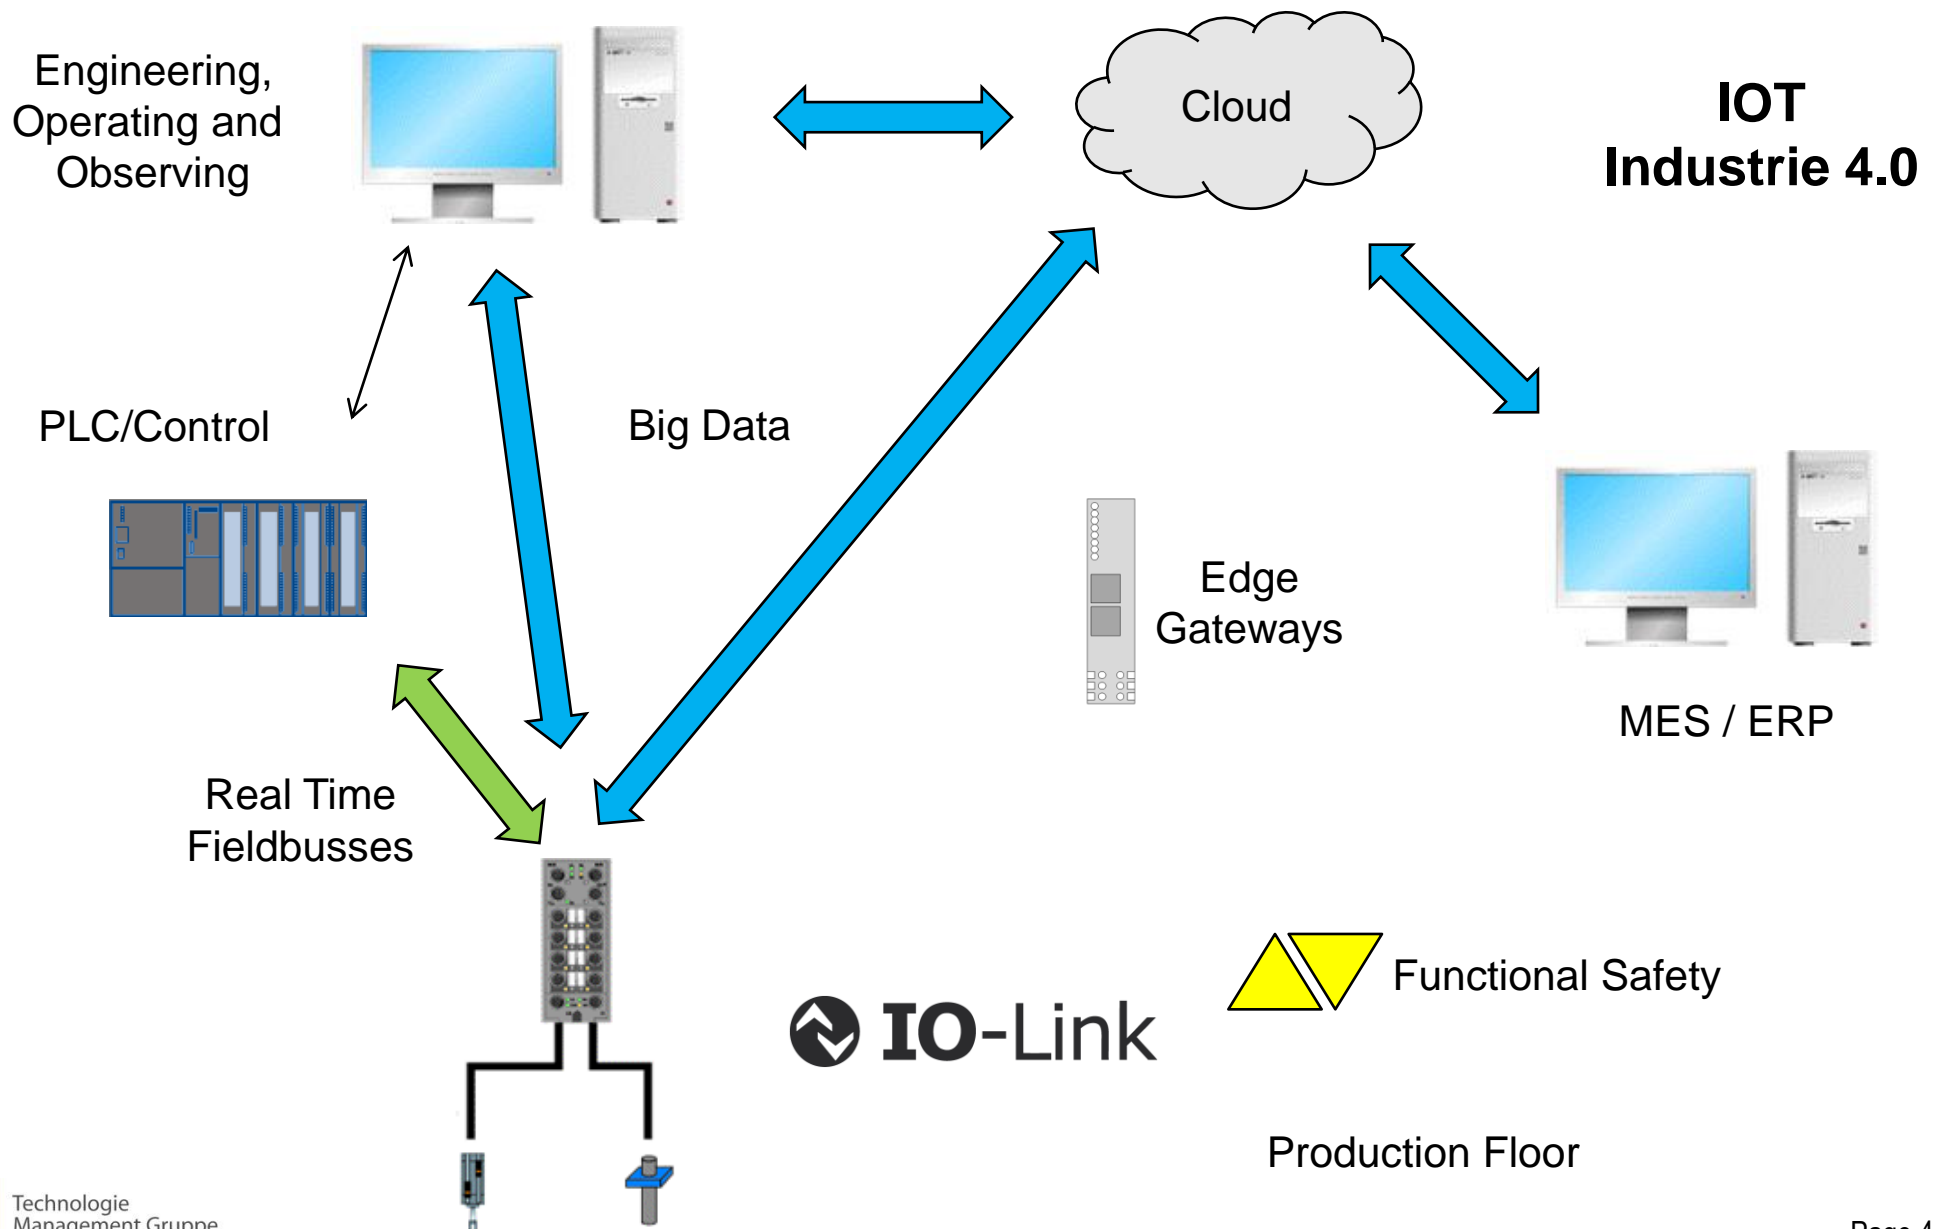



Technology



Membership




Distribution & Services





A strong Partnership for Industrial Communication

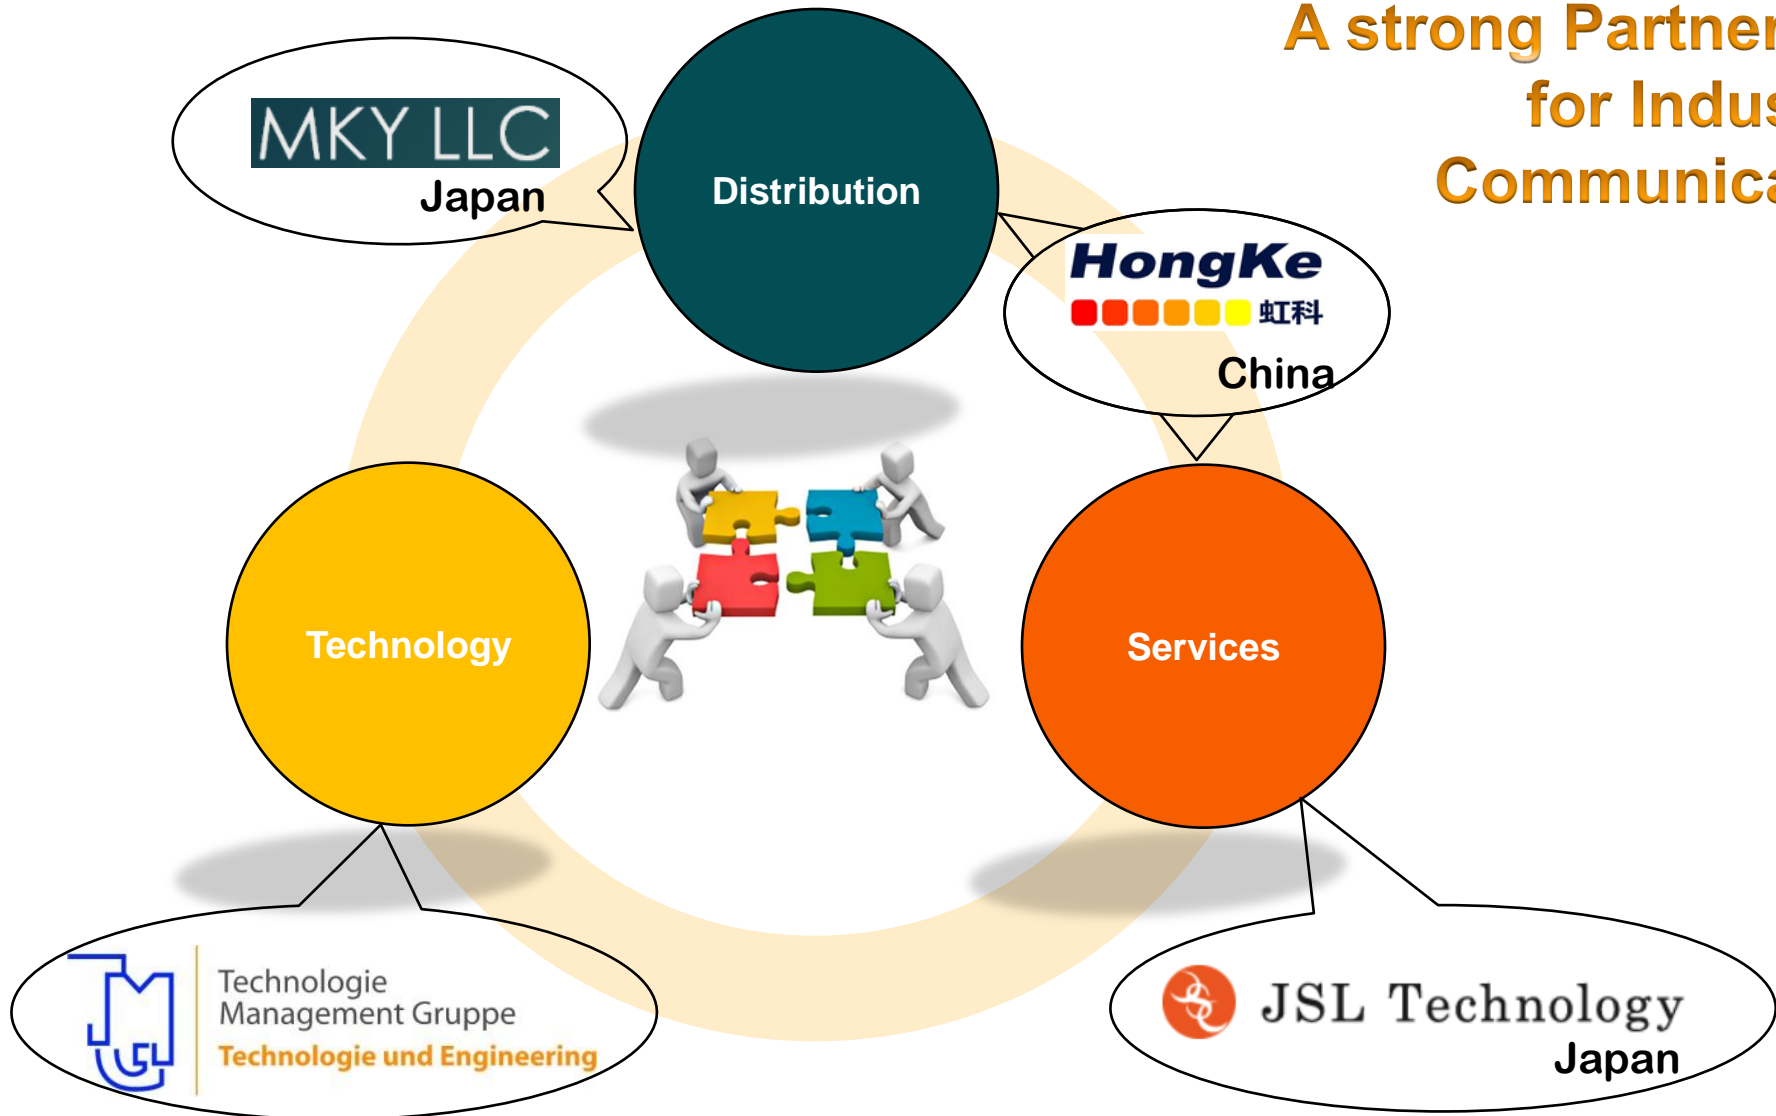



► Consulting

- Business Area Planning
- Choice of Technology
- Platform Concepts
- Choice of Technology Components
- Trainings & Workshops

► Certification and Test Support

- Expertise
- Interoperability Tests
- Operate demo systems
- Certification support
- IO-Link Device Test System
- Accredited as **IO-Link Test Center** (Master and Devices)

► Engagement in PI, ODVA, ETG & IO-Link Community

- Collaboration in many technical and marketing working groups
- Member of IO-Link steering committee
- Collaboration in user and development workshops of IO-Link and PROFINET



- ▶ IO-Link Master and Device Stacks (IO-Link & IO-Link Safety)
 - ▶ For many μ Controller platforms, IDE and transceiver chips
 - ▶ Globally leading
 - ▶ Fieldbus Integration
 - ▶ PROFINET, PROFIBUS, EtherNet/IP, EtherCat and others
 - ▶ Master Manufacturer and Fieldbus Crossing Engineering Tool
 - ▶ IO-Link Device Test System (also for IO-Link Safety)
 - ▶ Released by IO-Link Community. Binding prescribed for manufacturer declaration.
-
- ▶ PROFINET IO Device Stack (CCB, CCC)
 - ▶ System Redundancy S2 and Dynamic Reconfiguration
-
- ▶ EtherNet/IP Adapter Stack
-
- ▶ PROFIBUS DP/PA Slave Stacks
 - ▶ Without the need of an ASIC
 - ▶ PROFIBUS Master Stacks
-
- ▶ FSOE Master and Slave Stacks

powered by
molex



... **Device Development and Technology Integration** respectively for Industrial Information and Communication Technology by ...

- ▶ Realization of system and architecture analyses
- ▶ Problem oriented technology choice
- ▶ Specification and design
- ▶ Development and integration
- ▶ Porting and integration of software solutions
- ▶ Third party certification support
- ▶ Technology trainings und technology workshops
- ▶ Even if hardware development is not our core competence we help to review our customer's hardware designs for communication aspects and we offer hardware development together with partners





Integration know how

- ▶ For many different hardware and software architectures
 - ▶ Micro controllers 8,16 and 32 bit
 - ▶ Altera, Analog Devices, Cypress, Hilscher, Infineon, Intel, Maxim, Microchip, Microchip-ATMEL, NXP, Renesas, Siemens, STMicroelectronics, Texas Instruments, Xilinx and others
 - ▶ All IO-Link transceiver manufacturers
 - ▶ Maxim, Texas Instruments, STMicroelectronics, Dialog and others
- ▶ Use of many different compiler and development systems
 - ▶ Atmel Studio, Code Composer Studio, E2 Studio, Eclipse and GNU based IDEs, IAR, Keil, Visual Studio and others
- ▶ For many different embedded real time operating systems
 - ▶ Thread X, VxWorks, Linux, PxROS, EMBOS, ECOS, RCX, FreeRTOS, QNX, Sciopta and others

Also with communication stacks or ASICs from partners

- ▶ Ethernet & Internet technologies
 - ▶ TCP/IP, UDP, WEB server, FTP, SNMP, SMTP, NTP, IOT, MQTT, JASON and others
 - ▶ SPE, APL, WIFI, Bluetooth

TMG TE Software Development Process

Edition: 17th July 2011



Phases	Requirement Specification Phase	Design Specification Phase	Implementation Phase	Integration Phase	System Test Phase	Certification Phase	Project Release
Main Tasks	Requirement specification	Specification	Implementation	Integration	System test	Support of certification	Lessons learned
		Module specification	Development test	Integration test	Preparation of certification		
		Test specification	Module test implementation				
		Module test specification	Module test processing				
			User documentation				
Guidelines	Template Requirement Matrix	Specification-Template.doc ModuleSpec-Template.doc TestSpec-Template.xls	Codierungsrichtlinie TMG				
Tools	Excel	Word / Exel	Doxygen (if available for the IDE)				
				optional			mandatory

- ▶ Mandatory marked tasks should be documented at TMG TE or customer
- ▶ Optional tasks will be processed, if required, offered and ordered
- ▶ The listed guidelines and tools will be used, if there is no other requirement by the customer
- ▶ Software Development Process for functional safety available (experience 10 years)

... **PROFINET device implementation** respectively for factory automation and process automation ...



► PROFINET IO Device Stack

- Reference certification according Conformance Class A, B, C
- Easy to port to different platforms
- Platform package for Renesas RZ/N
- Sample/SDK with Texas Instruments for Sitara/AMIC
- Conformance Class C (IRT) with Texas Instruments Sitara/AMIC
- System redundancy and dynamic reconfiguration
- **IO-Link Integration**

► Projects with netX from Hilscher

- As well with other protocols like EtherNet/IP, MODBUS-TCP, EtherCAT, PowerLink ...

► Projects with functional safety, PROFIsafe

powered by
molex

RENESAS

**TEXAS
INSTRUMENTS**

hilscher
COMPETENCE IN
COMMUNICATION





► Compatibility to PROFINET

- PROFINET Version V24MU1_Mar20
- PROFINET test bundle 20200520: AutomatedRtTester_v2.41.0.2, Spirta_V2_41_0_0002

► Functionality

- Conformance Class A, B, C, PA
 - Conformance Class C only with Sitara/AMIC Family from Texas Instruments
- Fast Start Up
- MRP
- Shared Device
- Device Access
- System Redundancy S2 and Dynamic Reconfiguration (Option Package)
- Prepared for PROFINET PA (Multi Instances)
- Prepared for Profile API like IO-Link

► Footprint

- Code 300 kB Flash (without OS and SNMP)
- RAM 300 kB RAM

► Portable to many platforms (Single Chip Microcontrollers, RZ/T/N, SITARA)



... **EtherNet/IP development** also combined with internet technology and other industrial protocols



▶ EtherNet/IP Adapter Stack

- ▶ Easy to port to different platforms
- ▶ Platform packages for Renesas RZ/N
- ▶ Sample integration (SDK) for Texas Instruments Sitara/AMIC
- ▶ We took over the development, support and sales from Molex in 2018

powered by
molex

EtherNet/IP™

... **PROFIBUS DP V1 slave implementation** respectively
for factory and process automation ...



- Solutions with SPC4 and SPC3 ASIC from Siemens
- Solutions for PROFIBUS PA with SPC4, Find 1, Finch, ..
- Solutions for PROFIBUS DP 12 MBaud without special ASIC on microcontrollers from



.. and others

- Software stack developed by TMG
- More than 25 years experience as well as large world wide market share

... **PROFIBUS DP V1 master implementation** respectively
for factory and process automation ...

- Solutions with ASPC2 ASIC of Siemens
- Solutions for PROFIBUS PA with SPC4 or Find 1
- Software stack developed by TMG



▶ **IO-Link V1.1.2 Device Stack** (V1.1.3 in preparation)


- complete functionality, all telegram types
- supports also IO-Link V1.0 masters
- easy to port to all microcontrollers (8/16/32)
- works with all transceivers
- very small footprint
- configurable to specific device application

• **IO-Link V1.1.2 Stack Extensions** (V1.1.3 in preparation)

- Implements the IO-Link related device application with
 - Parameter Manager, Data storage, Block Parameterization,
 - Device Access Locks, Event Dispatcher,
 - Device Status and Detailed Device Status
 - Parameter Consistency Check, Reset to factory settings
- Production settings (like serial number, calibration and pre parameterization of variants)
- Best practice implementation proved in many customer projects

• **IO-Link Device – Firmware Update**

- Firmware download via IO-Link boot loader
- Supported from IO-Link Device Tool V5.1
- Firmware Packager based on IODD; supports firmware encryption

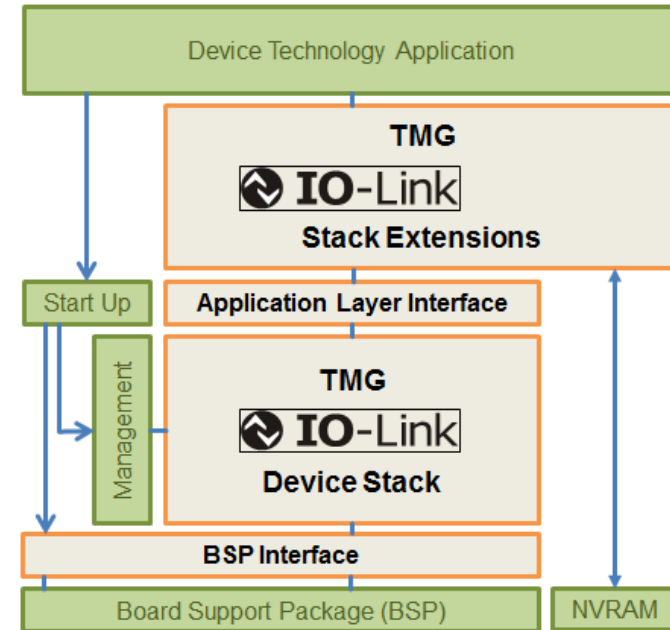




Time to market
Focus on core competencies
Cost saving

We help our customers to start with IO-Link

Target of the enabling project is know how transfer


Further developments should be possible without the help of a service provider

- ▶ IO-Link Technology Workshop
 - Overview for developers, product managers, support and test
- ▶ IO-Link Device Specification Workshop
 - Use innovation potential of IO-Link instead to provide only existing functionality
 - The target is to work all requirements to create the IODD and start integration
- ▶ Integration of IO-Link related software on target hardware
 - Create IODD and coordinate with the product management of our customer
 - Board support, IO-Link communication, IODD implementation, Interface to device application
 - Functionality for End of Production Settings (like serial no, calibration, ...)
 - Preliminary IO-Link conformance check
- ▶ Software Hand over Workshop
 - Software handover and introduction in application interface and device test
- ▶ Conformance Test or conformance test workshop

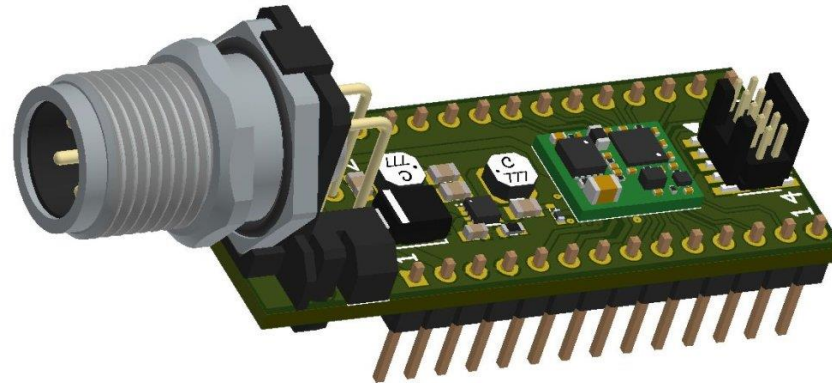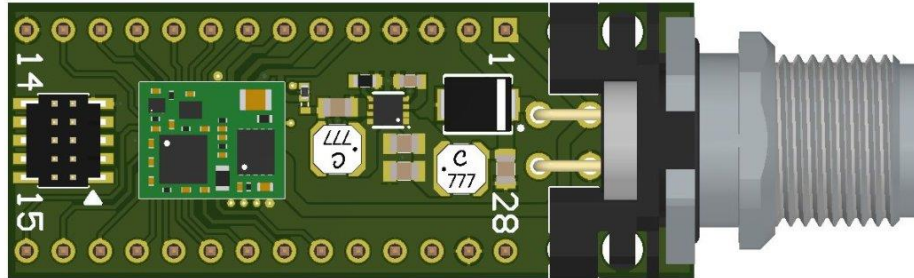

- ▶ Cortex M4 – (up to 120MHz)
- ▶ For automatic population
- ▶ Delivery on reel
- ▶ Break out board for prototyping and evaluation
- ▶ 8mm x 10mm
- ▶ Product variants
 - With IO-Link Software
 - Evaluation Board

- ▶ IO-Link Device V1.1.2 (V1.1.3 in preparation)
- ▶ All IO-Link functions like Data Storage, Block Parameterizing and Diagnosis, Common Profile
- ▶ Firmware Update, End of Production Line Parameterization
- ▶ Several generic configurable basic applications available; customizing possible
- ▶ Serial communication to application controller

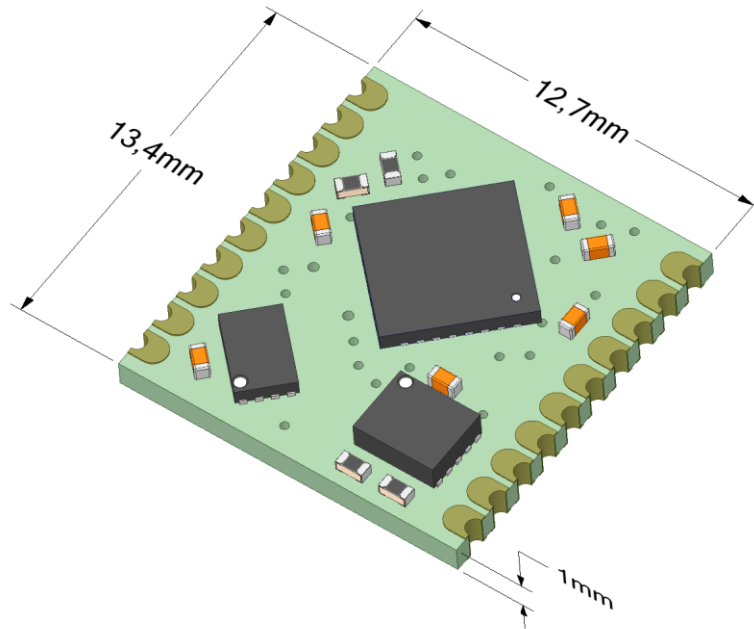

- ▶ Cortex M4 – (up to 72MHz)
- ▶ Easier population
- ▶ Delivery on reel
- ▶ Simplified prototyping and evaluation by using pin headers
- ▶ 12,7mm x 13,4mm

- ▶ IO-Link Device V1.1.2 (V1.1.3 in preparation)
- ▶ All IO-Link functions like Data Storage, Block Parameterizing and Diagnosis, Common Profile
- ▶ Firmware Update, End of Production Line Parameterization
- ▶ Several generic configurable basic applications available; customizing possible
- ▶ Serial communication to application controller



▶ **IO-Link V1.1.3 Master Stack**

- supports all telegram types (230kBit/s, 400µs cycle time)
- easy to port to several microcontrollers
- Includes parameter server (data storage)
- Already implemented to V850, Rx, RZ/N , 78K0R, 80C164, PIC32, STM32, R32, ARM9, CORTEX M3/M4, Sitara/AMIC and others
- Support of many master transceivers
- Number of ports depends only on µC resources


▶ **IO-Link V1.1.2 In Design Solution** (V1.1.3 in preparation)

- based on STM32 Cortex M4 and Maxim Transceiver
- 2, 4 or 8 ports
- SPI communication to host controller
- Host library, portable, ANSI-C Source Code
- Pre certified with TMG test report
- Can be evaluated with
 - MAXIM MAXREFDEF165#





- ▶ Texas Instruments – Sitara AM 437 – Evaluation Board
 - 8 Channel IO-Link Master with TI device Phy IOL111
 - PROFINET (EtherNet/IP and EtherCat)
 - TMG Interface Protocol and IO-Link Device Tool V5.1 – Professional Edition
 - We did also IO-Link Master on AM335 with Maxim transceiver
- ▶ Renesas RZ/N 1S, 1D
 - 8 Channel IO-Link Master with Chreative or Maxim Master Transceiver
 - PROFINET, EtherNet/IP and EtherCat
 - TMG Interface Protocol and IO-Link Device Tool V5.1 – Professional Edition

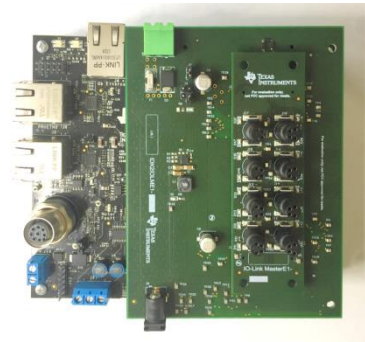



▶ **IO-Link Device Tool Communication Protocol**

- Fieldbus independent protocol for
 - IO-Link Device Tool
 - Master Test
 - Industrie 4.0 applications, 2nd Channel
- Based on UDP
- New version in preparation “SMI-TCP”
 - based on TCP/IP
 - Standard Master Interface (SMI)
 - Modular Systems
 - Support of sub networks

▶ **Fieldbus Integration**

- Based on Standard Master Interface (SMI)
- PROFINET
 - Integration specification ED 2
- EthetNet/IP
- EtherCat, MODBUS TCP, Powerlink
- PROFIBUS
- and others



► SMI-TCP

- IO-Link Device Tool V5.1 - PE
- IO-Link Master Test
- Industrie 4.0 and IOT applications
 - 2nd Channel, Y-Connection
- based on
 - TCP/IP
 - Standard Master Interface (SMI)
 - Mandatory with IO-Link V1.1.3
- Support of
 - Modular IO Systems
 - Sub networks (up to 3 levels)
- Small footprint
- Open specification



Master manufacturer and fieldbus crossing operation

- ▶ According to the requirements of the automotive industry
- ▶ Executable as independently Windows application
- Integration into PLC engineering tools like TIA Portal

IO-Link master / port configuration

- ▶ Operation of IO-Link master without PLC possible
- ▶ Master Plug-In for customizing
- ▶ Data Storage content transfer and storage
- ▶ Multiple Communication interfaces available
 - USB, UDP, TCP/IP, TCI-Communication-Server, Customized interfaces possible


IO-Link device operation and observation

- ▶ IODD V1.0.1 / V1.1 interpreter
- ▶ All IO-Link devices world-wide without restriction
- ▶ Open IO Device GUI (Extension for graphical user interface)
- ▶ IODD Viewer
- ▶ IO-Link Device Firmware Update Support
- ▶ IO-Link Safety (parameterization and commissioning)
- ▶ IODDFinder Support



OEM Version
possible

IO-Link Device Tool – TCI : Call from PROFINET/PROFIBUS Configuration

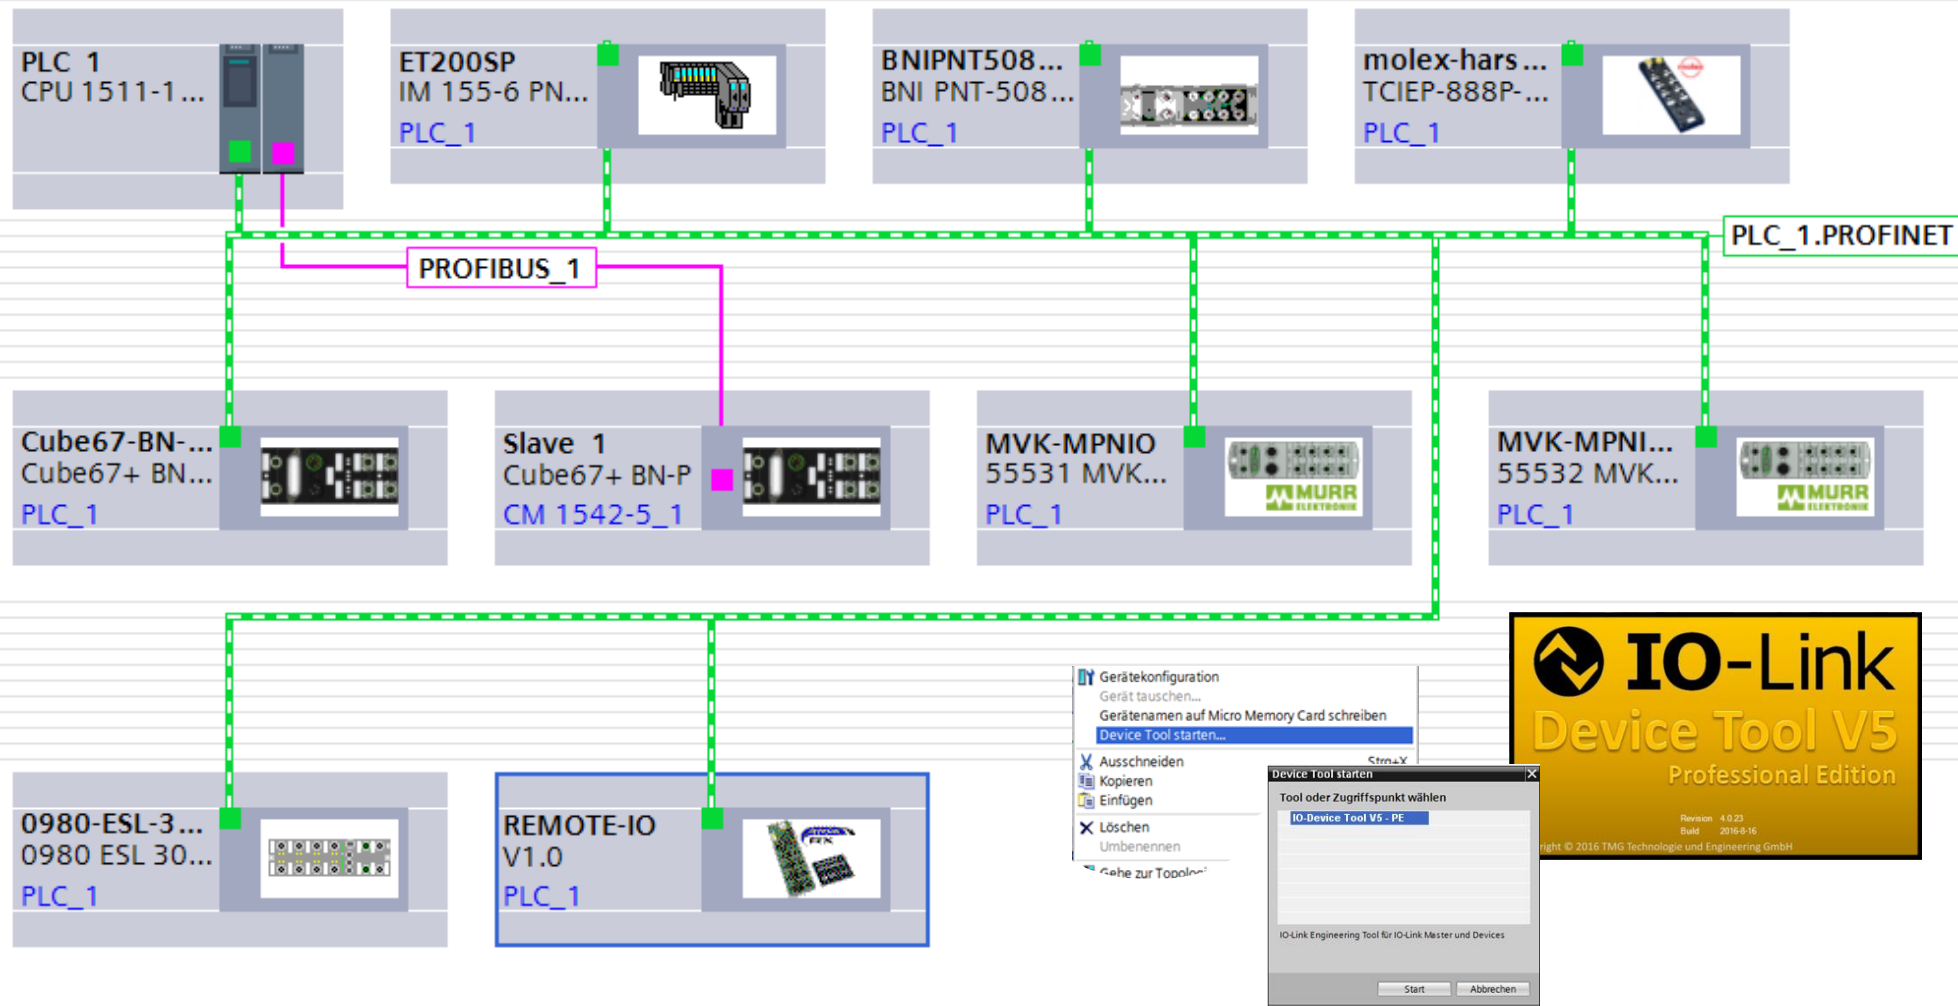

- ▶ PROFINET & PROFIBUS Hardware Configuration with IO-Link masters of multiple vendors
- ▶ Supported from IO-Link Device Tool – use right mouse click „Start Device Tool“

IO-Link Device Tool – TCI : Call from PROFINET/PROFIBUS Configuration

TCI_Project IO-Link Device Tool V5 - PE

File Options Help Logged in as Specialist

(3) 56526 Cube67+ BN-PNIO | (1) BNI PNT-508-105-Z015 | (2) BNI PNT-509-105-Z033 | (4) 55531 MVK DIO14 DIO2/IOL2 IRT | (5) 55532 MVK DIO12 DIO4/IOL4 IRT | (6) 0980 ESL 309-121

(5) 55532 MVK DIO12 DIO4/IOL4 IRT

Vendor: Murrelektronik GmbH

IO-Link Master

Name: 55532 MVK DIO12 DIO4/IOL4 IRT
Revision: IO-Link Revision 1.1
Name of Station: ioltrack-mvk2
IP Address: 192.168.0.167
MAC Address:

Go Online Flashing Search Master

PROFINET

Ports

Module	Port	Pin	Mode	Details	Vendor	Device	O	I
2 (B0)	1	4	IO-Link					
2 (B0)	2	4	IO-Link					
2 (B0)	3	4	IO-Link					
2 (B0)	4	4	IO-Link					

Port Config Details

Device Identification

Vendor ID Device ID Product ID Serial Number

IODD IO-Link Revision Inspection Level NONE

Process Data

Configured Input Length 16 Device Input Length

Configured Output Length 16 Device Output Length

Data Storage

Mode DISABLED

Topology

PROFIBUS

PROFINET

(11) 56521 Cube67+ BN-P

(192.168.0.163) BNI PNT-508-105-Z015

(192.168.0.164) BNI PNT-509-105-Z033

(192.168.0.165) 56526 Cube67+ BN-PNIO

(192.168.0.166) 55531 MVK DIO14 DIO2/IOL2 IRT

(192.168.0.167) 55532 MVK DIO12 DIO4/IOL4 IRT

(192.168.0.168) 0980 ESL 309-121

Catalog

Filter

Master

- Balluff GmbH
- Baumer Electric AG
- Belden Deutschland GmbH - Lumberg Aut
- Creative Chips GmbH
- Murrelektronik GmbH
- Renesas Electronics Europe GmbH
- Siemens AG
- TMG & HSU-EMT
- TMG TE GmbH
- IO-Link
 - Balluff
 - Baumer Electric AG
 - ifm electronic gmbh
 - microsonic GmbH
 - Renesas Electronics Europe GmbH
 - SICK AG
 - TMG TE GmbH

TCI_Project IO-Link Device Tool V5 - PE

File Options Help Logged in as Specialist

(3) 56526 Cube67+ BN-PNIO (1) BNI PNT-508-105-2015 (2) BNI PNT-509-105-2033 (4) 55531 MVK DIO14 DIO2/IOL2 IRT
(5) 55532 MVK DIO12 DIO4/IOL4 IRT (6) 0980 ESL 309-121 (5) [114] TMG Color 01

TMG Color 01 at 55532 MVK DIO12 DIO4/IOL4 IRT (5) [114]

block write mode

Common Process Data Identification Observation Parameter Diagnosis Generic

name	R/W	Value	State	Unit
Standard Command	wo	White calibration		
Standard Command	wo	Teach Color 1		
Standard Command	wo	Teach Color 2		
Standard Command	wo	Teach Color 3		
Standard Command	wo	Teach Color 4		
Standard Command	wo	Teach Clear Limit		
Standard Command	wo	Teach IR Limit		
Standard Command	wo	Reset Temperature Values		
Standard Command	wo	Restore Factory Settings		
[-] Options				
Gain	rw	1 x	i	
Integration Time	rw	25	i	
Nb of samples for moving average	rw	1	i	
Temperature Limit	rw	25.0	i	°C
Red Hysteresis	rw	10	i	%
Green Hysteresis	rw	10	i	%
Blue Hysteresis	rw	10	i	%
Pin2 Mode	rw	Ambient Light Switch	i	
Device Access Locks.Parameter (write) Access Lock	rw	false	i	
[-] Teach values				
[-] White Calibration Values				
Red Correction	rw	100	i	%
Green Correction	rw	100	i	%
Blue Correction	rw	100	i	%
Clear Correction	rw	100	i	%

Topology

- PROFIBUS
 - (11) 56521 Cube67+ BN-P
- PROFINET
 - (192.168.0.163) BNI PNT-508-105-2015
 - (192.168.0.164) BNI PNT-509-105-2033
 - (192.168.0.165) 56526 Cube67+ BN-PNIO
 - (192.168.0.166) 55531 MVK DIO14 DIO2/
 - (192.168.0.167) 55532 MVK DIO12 DIO4/
 - (114) TMG Color 01
 - (192.168.0.168) 0980 ESL 309-121

Catalog

- Belden Deutschland GmbH - Lumberg
- Creative Chips GmbH
- Murrelektronik GmbH
- Renesas Electronics Europe GmbH
- Siemens AG
- TMG & HSU-EMT
- TMG TE GmbH
- IO-Link
 - Balkuff
 - Baumer Electric AG
 - ifm electronic gmbh
 - microsonic GmbH
 - Renesas Electronics Europe GmbH
 - SICK AG
 - TMG TE GmbH
 - Sample Devices
 - Sample Device
 - Sample Device A (IOL1.1)
 - Sample Device B (IOL1.1)
 - Sample Device A (IOL1.0)
 - Sample Device B (IOL1.0)
 - TMG Color Sensor
 - TMG Color 01 (IOL1.1)



IO-Link Device Tool – Open IO Device Graphical User Interface – New TAB

TMG Color 01 at TMG USB IO-Link Master V2 - TS (1) [0/4]

direct write mode

Common Process Data Identification Observation Parameter Diagnosis **Device GUI** Generic IODD

Sample for Open Device GUI

Technologie Management Gruppe
Technologie und Engineering

IODD: TMG-Color-01-20160208-IODD1.1.xml
GUI DLL: TMG-Color-01-IOGGUI en
Connection Status: ■ Process Data Access
User Role: Specialist

Options
Conv: 1 x | 25ms
Filter: 1
Reset to factory settings

Process Data

Measured color

White Calibration

Clear IR Temp

Output Bit

Color 1 detected
Color 2 detected
Color 3 detected
Color 4 detected
Ambient Light Limit detected
IR Limit detected
Temperatur Limit detected
Output Bit mirrored

Test Color

Teach Limits Direct Access

Teach Color 1 Teach Color 2 Teach Color 3 Teach Color 4 Teach Ambient Light Teach Infra Red

red green blue

value

**Additional
TAB
Device GUI**
if Device DLL
is installed with IODD



▶ Standard Edition (Service and Sales)

- Parameterization, observation and diagnosis of IO-Link devices
- IODD V1.0.1 and V1.1
- Please ask us for brand labeling options

▶ Device Test System

- Functionality of Development Edition +
 - Execution of certification test for IO-Link V1.1 and V1.0 devices
 - Test configuration from IODD
 - Creates test report for self certification

▶ USB IO-Link Master V2 – EMC

- EMC Test Master to perform IO-Link EMC Test
- Very easy to use



TMG IO-Link Device Test System

File Options View Help

Online Specialist

Common Manual Test Device Test

Device Properties

Vendor ID: 0x018C Device ID: 0x18C001 Product ID: 78K0R-2NDCHANN ☒ ISDU supported ☒ SIO Mode supported

Process Data Inputs (bits): 32 Process Data Outputs (bits): 8 MinCycleTime: 2300 µs IO-Link Version: 1.1

Test variable for 8Bit index access Index: 0 Length: 0 Data for test (hex):

Test variable for 16Bit index access Index: 0 Length: 0 Data for test (hex):

Test variable 8Bit index extended length Index: 0 Length: 0 Data for test (hex):

Access locks: 0 Implemented system commands:

☐ Data storage supported F-sequence Capability: 0x 1F

Edit Cancel Commit

Test Cases

	Id	Description	ISDU	V1.0	Mand.	Run
<input checked="" type="checkbox"/>	Block Parame...					
<input checked="" type="checkbox"/>	NEU TCD_D...	Test of Block Parame...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	NEU TCD_D...	Test break of Block P...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	NEU TCD_D...	Test break of Block P...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	NEU TCD_D...	Test break of Block P...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	NEU TCD_D...	Test break of Block P...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	NEU TCD_D...	Test locking of local p...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	Data Layer T...					
<input checked="" type="checkbox"/>	OK TCD_DLP...	Test Startup with diffe...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	OK TCD_DLP...	Test state transition S...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	OK TCD_DLP...	Test illegal state transi...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	OK TCD_DLP...	Test state transition O...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	OK TCD_DLP...	Test state transition O...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	OK TCD_DLP...	Set Device from STA...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	OK TCD_DLP...	Set Device from STA...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	ERR TCD_D...	Set Device from STA...	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	


Outputs

Trace


Topology

TMG USB IO-Link Master TS (I

[0] 78K0R-2nd Channel Sa

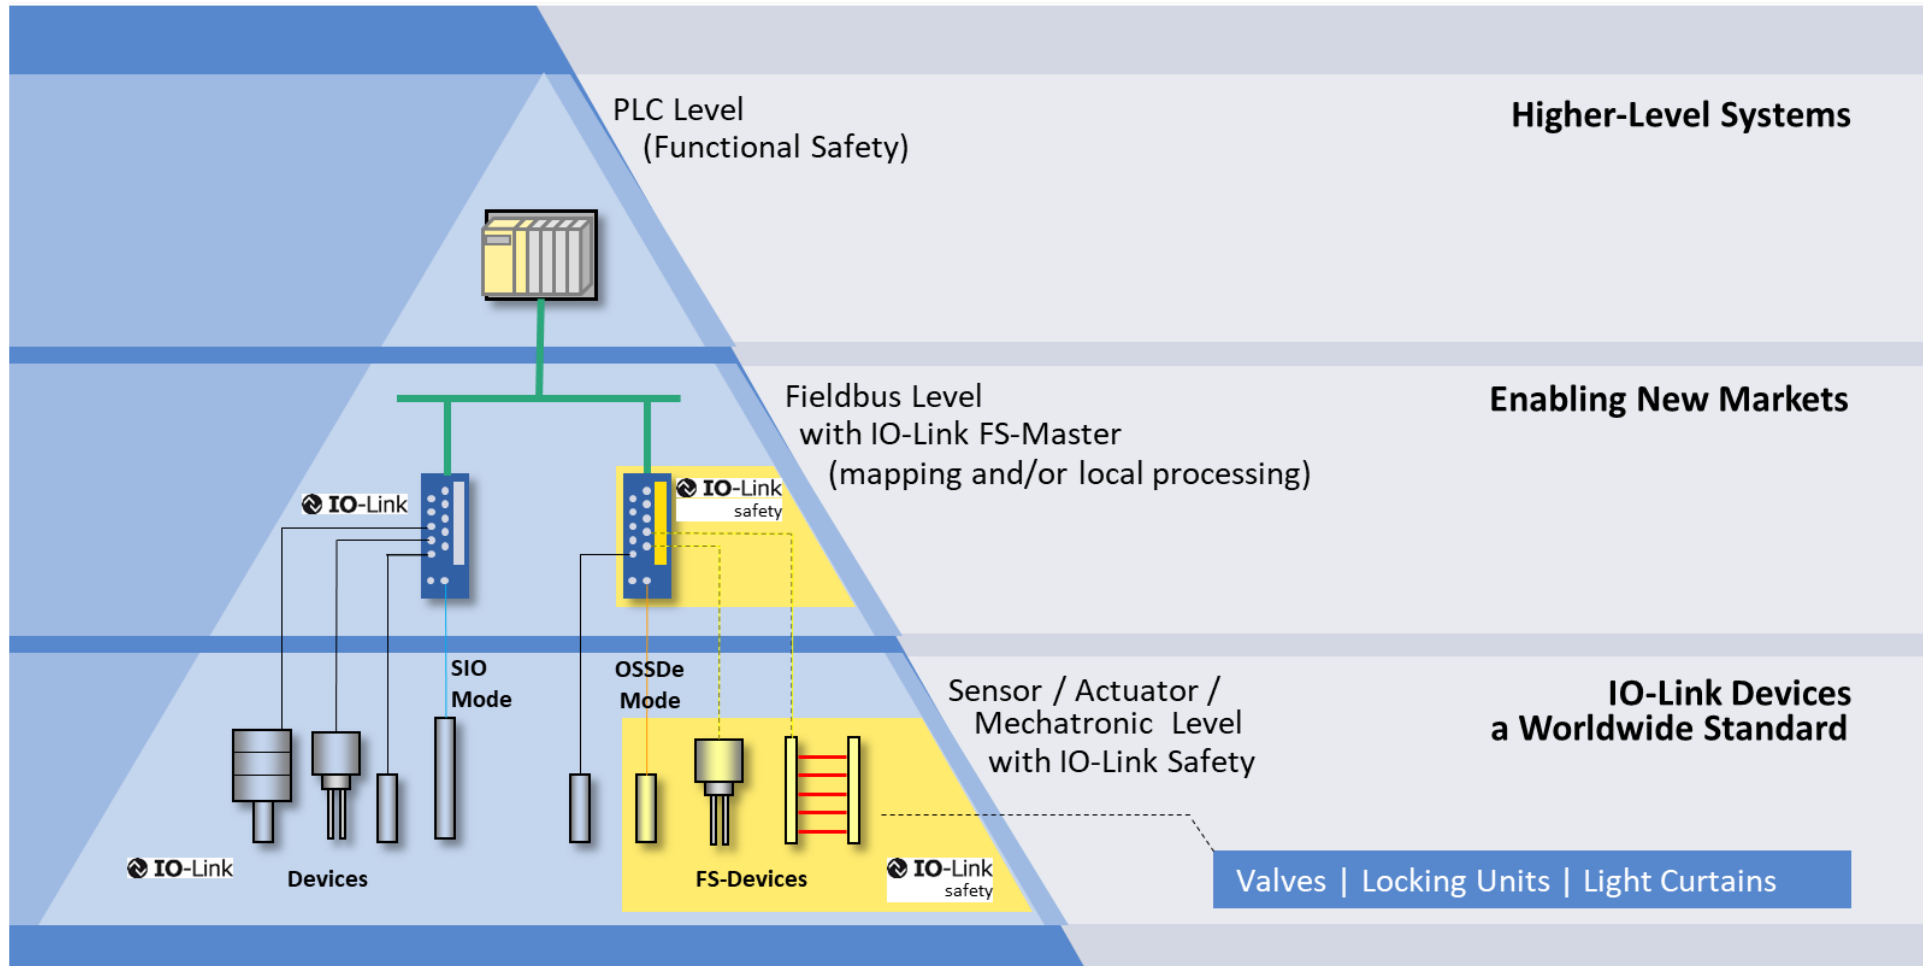


- ▶ Safety Libraries with configuration, verification and SCL layer
 - Delivered as certified component
 - Portable source code, secured against unintentional change
 - Platform and architecture independent approach
 - e.g. 2 or 3 microcontrollers, safe operation system or dual core
- ▶ User and integration manual with sample integration code
 - For synchronization of the safety controllers for SIL 3 design
 - Watchdog, Black channel and application interface
 - For IO-Link Safety Masters:
 - Standardized Master Interfaces (SMI) for configuration
 - master safety application: FSCP Mapping, Master Test Interface, Safety Application like F-PLC
- ▶ Prototype available, assessment and certification in preparation

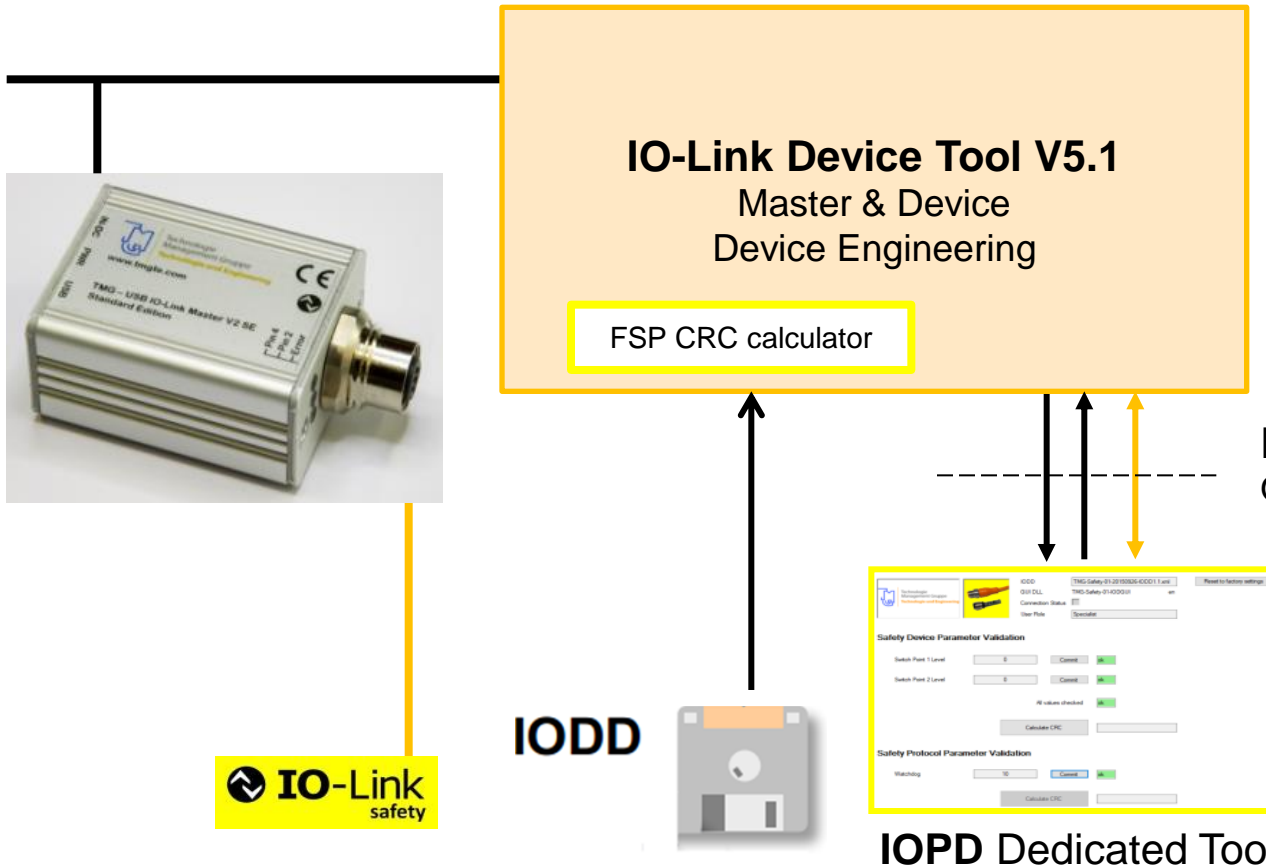



IO-Link Safety Engineering Tool (multi master vendor approach)

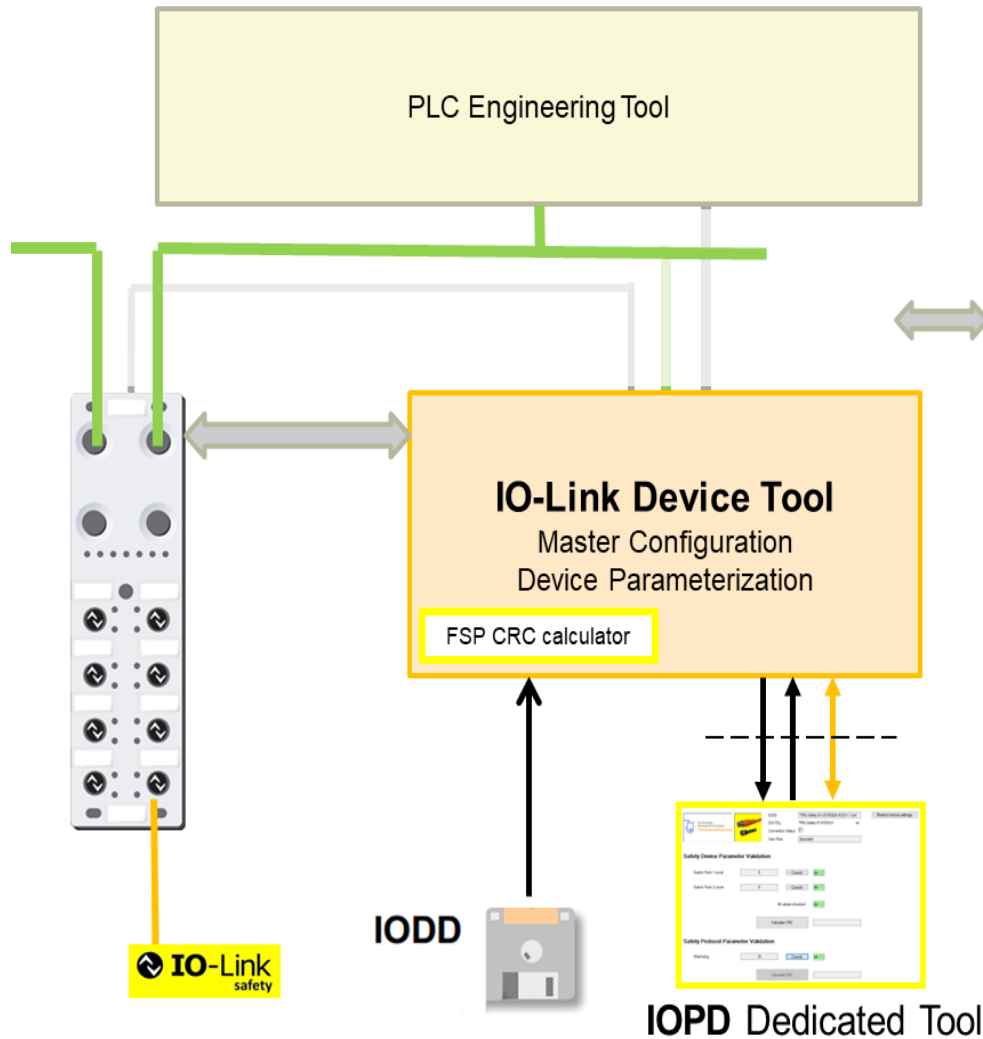

The IO-Link Device Tool provides the connection to the IO-Link Safety Master via e.g.

- Protocol on Ethernet
- Local Interface (like USB)
- SW interface like TCI CS

Depending on the PLC Engineering System the IO-Link Engineering Tool will use SW interfaces to exchange engineering information also for integration in upper FSCP

DTI Interface

Online & Offline Configuration

- Invocation (TPF)
- Back channel (TBF)
- Communication Server (Online)

Can also be customized as OEM version


IO-Link Device Tool V5.1 - PE

File Options Special View Help Logged in as Specialist

(1) TMG USB IO-Link Master V2 - TS - FS-POC

(1) TMG USB IO-Link Master V2 - TS - FS-POC

Vendor: Technologie Management Gruppe Technologie und Engineering TMG TE GmbH

IO-Link Master:  Name: TMG USB IO-Link Master V2 - TS - FS-POC Revision: IO-Link Revision: V1.1 COM Port: Serial Nb:

Search Master

USB Universal Serial Bus

Ports

Pin	Mode	Details	Vendor	Device	O	I
4	IO-Link					
2	IO	DI				

Port Config Details

Device Identification

Vendor ID: Device ID: Product ID: Serial Number: IODD: IO-Link Revision: V1.1 Inspection Level: NONE

Process Data

Configured Input Length: 32 Device Input Length: Configured Output Length: 32 Device Output Length:

Data Storage Mode: DISABLED

Topology

Search Master

USB

(1) TMG USB IO-Link Master V2 - TS -

Catalog

Filter applied

Master

- Balluff GmbH
- Baumer Electric AG
- Belden Deutschland GmbH - Lumberg A
- Creative Chips GmbH
- di-soric GmbH & Co. KG
- elobau GmbH & Co. KG
- Festo AG & Co. KG
- ifm electronic gmbh
- Molex
- Murrelektronik GmbH
- Pepperl+Fuchs GmbH
- Phoenix Contact GmbH & Co. KG
- Renesas Electronics Europe GmbH
- Siemens AG
- TMG & HSU-EMT
- TMG TE GmbH
- wenglor sensoric GmbH
- IO-Link safety
- IO-Link

- ▶ Automatic generated headlines for safety and standard items
- ▶ Highlighting the safety items

TMG-Sick-IOLS-Light-Curtain at TMG USB IO-Link Master V2 - TS - FS-POC (1) [0|4]

block write mode

Common Process Data Identification Observation Parameter Diagnosis Scope Generic IODD

Name	Value	Unit
[-] Process Data In		
[-] Safety Items		
Light Path Interruption		
F-Message Trailer		
[-] Standard Items		
Counter		
[-] Process Data Out		
[-] Safety Items		
Remote Enable		
F-Message Trailer		

Visualization of the Safety Parametrization

TMG-Sick-IOLS-Light-Curtain at TMG USB IO-Link Master V2 - TS - FS-POC (1) [0]4

block write mode

Common Process Data Identification Observation Parameter Diagnosis Scope Generic IODD

name	R/W	Value	State	Unit
[-] Standard (non-safety) parameter				
Triggered since power on	ro		e	
Standard Command	wo	Reset Counter Value		
Standard Command	wo	Restore Factory Settings		
[-] Fail-safe technology parameter				
Reset mode	rw	auto	i	
Reach setting	rw	near	i	
Resolution	rw	low	i	
[-] Fail-safe protocol parameter				
Authenticity.FSCP_Authenticity_1	rw	0	i	
Authenticity.FSCP_Authenticity_2	rw	0	i	
Authenticity.FSP_Port	rw	0	i	
Authenticity.FSP_AuthentCRC	rw	0	i	
Protocol.FSP_ProtVersion	rw	V1	i	
Protocol.FSP_ProtMode	rw	16 Bit CRC	i	
Protocol.FSP_Watchdog	rw	100	i	
Protocol.FSP_IO_StructCRC	rw	5115	i	
Protocol.FSP_TechParCRC	rw	0	i	
Protocol.FSP_ProtParCRC	rw	0	i	
FS_Password	wo			
Reset_FS_Password	wo			



- ▶ FSOE Master Stack
 - ANSI C
 - Modul tests on RL78 (Renesas)
 - Software Development Process according to SIL 3

- ▶ FSOE Slave Stack
 - ANSI C
 - Modul tests on RL78 (Renesas)
 - Software Development Process according to SIL 3

- ▶ Can also be used outside of EtherCAT, e.g. TCP/IP, UDP, PROFINET, EtherNet/IP or MODBUS TCP



Thank You

TMG Technologie und Engineering

Industrial Communication
without borders